In view of the Unsigned Declaration as filed with this application and pursuant to 37 CFR §1.53(d), Applicant requests deferral of the filing fee until submission of the Missing Parts of Application.

Notification of change of [] power of attorney [] correspondence address filed in prior application.

DO NOT CHARGE THE FILING FEE AT THIS TIME.

Telephone: (415) 576-0200

Facsimile:

A [] signed [X] unsigned Declaration.

Information Disclosure Statement under 37 CFR 1.97. A petition to extend time to respond in the parent application.

(415) 576-0300

Reg No.: 35,819 Attorneys for Applicant

Philip H. Albert

[X]

PATENT APPLICATION

AUTOMATIC MESSAGE INTERPRETATION AND ROUTING SYSTEM

Inventor(s):

Amy Rice 22 Whitlock Lane Ridgefield, CT 06877 a citizen of United States of America

Julie Hsu 370 State Street #2 Brooklyn, MA 11217 a citizen of United States of America

Assignee:

Brightware, Inc. (a Delaware corporation) 350 Ignacio Blvd. Novato, CA 94949

Entity: Small

PATENT

Attorney Docket No.: 17111-23

AUTOMATIC MESSAGE INTERPRETATION AND ROUTING SYSTEM

5

CROSS REFERENCE TO RELATED APPLICATIONS

This application is based on and claims priority from U.S. Patent Application No. 08/____, filed May 8, 1997 entitled "AUTOMATIC MESSAGE INTERPRETATION AND ROUTING SYSTEM, United States Provisional Patent Application No. 60/042,494, filed April 3, 1997, entitled ELECTRONIC ROUTER FOR E-MAIL, and United States Provisional Patent Application No. 60/042,656, filed April 4, 1997, entitled ELECTRONIC ROUTER FOR E-MAIL, each of which are incorporated herein by reference for all purposes.

15

20

25

30

10

BACKGROUND OF THE INVENTION

1. Field of the Invention

The present invention relates to a system for automatically interpreting an incoming data message and, more particularly, the invention relates to a system using combined rule based and case based reasoning in interpreting, classifying, categorizing, prioritizing and responding to electronic messages.

2. Related Art

Many businesses have recently sought to expand access to their products and services by using the Internet and other on-line information channels to reach current and potential customers. Indeed, marketing campaigns which solicit customers over online information channels using electronic messages are becoming increasingly popular. These marketing campaigns have become very successful and often customers also contact a business concern using electronic messages (for example, E-mail) to request, among other things, product information, account status, and access to products and services.

Businesses have experienced problems in adapting their business practices to respond to large volumes of incoming electronic messages transmitted over a variety of communications channels (e.g., the Internet, telecommunications channels, and the like). These businesses have had to develop methods for quickly, accurately and efficiently responding to the increased volume of incoming electronic messages in order to meet the demands of their customers. In the case of the banking industry, electronic commerce laws may require a bank to respond to certain types of electronic correspondence within a specified period.

The problems imposed on businesses in formulating methods to quickly respond to electronic messages will only be exacerbated as the use of on-line information channels and electronic messaging increases in the future.

Some businesses have responded to increases in incoming electronic messages by having employees work longer hours or employing more people to review and respond to the messages. These methods have the drawbacks of significantly increasing the business costs associated with hiring, training and/or compensating personnel as well as requiring an increase in capital equipment and office space.

An event driven rule based messaging system, see U.S. Patent No. 5,555,346 to Gross et al., has been described which employs user specified "when-if-then" rules to manage incoming E-mail messages. The system provides a user with such features as a tickler (permitting the user to put off dealing with the E-mail for a specified period), an automatic forwarding feature, and an automatic replying feature. The forwarding and replying features are triggered by one or more of the form of the message, the source of the message and key words used in the body of the message. For example, when a recipient of E-mail will be out of the office, he or she may specify that any E-mail received from T. Jones should be automatically responded to with the message "I'm out of the office until June 1, see L. White if you need something immediately."

Unfortunately, the rule based messaging system described in U.S. Patent No. 5,555,346 has several drawbacks. For example, that system requires that the recipient of the E-mail know the identity of the sender (i.e., the sender is pre-determined by the user) and, therefore, would be non-responsive to E-mail coming from new customers. Further, because the so-called automatic response is not capable of being altered in accordance with the message content of each incoming E-mail, the response

15

20

25

30

10

must be overly simple, overly broad or require that a further response be formulated by another individual.

Software coded systems for executing procedural rules using well known computer languages, for example, COBOL are not well suited for implementing a knowledge-based system for interpreting incoming electronic messages. Indeed, such procedural rules would require impractically large and complicated branched coding structures to respond to the unpredictable and intricate content of the incoming electronic messages.

Natural language processing products such as SRA or Logicon or augmented transition network in custom developed applications such as the Intelligent Banking System (see Sahin, K. and Sawyer, K. THE INTELLIGENT BANKING SYSTEM: NATURAL LANGUAGE PROCESSING FOR FINANCIAL COMMUNICATIONS. Innovative Applications of Artificial Intelligence, AAAI Press. 1989) are unsuited for producing a response to an incoming electronic message. Indeed, such systems have relatively limited sets of key linguistic clues which are expressible in rule form. Consequently such systems might only provide a pre-processor function to a classification or reasoning task at great expense and complexity.

A help desk application utilizing a case based reasoning system, see U.S. Patent No. 5,581,664 to Allen et al., has been described which compares an incoming set of facts (a "Problem") with a stored set of exemplar cases (a case base). The system then performs the same action for the problem as was performed in connection with the stored case. The case base is stored in the form of case attributes representing past "problems." The case attributes are compared to the facts of the incoming problem using trigram character matching to obtain a set of prior cases which may be useful in formulating an appropriate action.

Unfortunately, the help desk application described in U.S. Patent No. 5,581,664 has several drawbacks. For example, a user must interact with the system to narrow down the results of the case base search to obtain the "best" case match. Consequently, the system would not provide satisfactory results if the input to the system was an electronic message and no user interaction was provided. Further, the system is not capable of automatically responding to the sender of an electronic message. Indeed, a representative or the user must interactively interpret the set of cases retrieved from the case base to obtain a response to the "problem."

20

25

30

15

5

Accordingly, there is a need in the art for a system which overcomes the shortcomings of the prior art by receiving electronic messages, classifying and categorizing the messages, and automatically responding to the messages without the intervention of a human operator.

5

10

15

20

25

SUMMARY OF THE INVENTION

The process of reviewing electronic messages involves complex reasoning which is distinctly knowledge specific. The present invention was developed in a banking industry context and was based on domain specific knowledge of banking products and services. It is understood that the present invention is not limited to the banking industry context and that one skilled in the art could readily adapt the teachings herein to other industries.

It is understood that a manual process for classifying and formulating responses to ambiguous and/or new electronic messages requires experience and often the collective experience of several members of a business team. Human electronic message reviewers read each message from beginning to end while continuously evolving a final interpretation by recursively applying business knowledge to the content of the message.

Therefore, the method and system of the present invention emulates the recursive nature of evolving interpretation by utilizing a knowledge base to execute reasoning tasks which automatically classify incoming electronic messages and automatically obtain responses to the messages.

In order to overcome the disadvantages of the prior art, the method of the present invention includes a method for automatically interpreting an electronic message including the steps of (a) receiving the electronic message from a source; (b) interpreting the electronic message using a rule base and case base knowledge engine; and (c) classifying the electronic message as at least one of (i) being able to be responded to automatically; and (ii) requiring assistance from a human operator.

According to another aspect, the present invention includes a method for automatically interpreting an electronic message including the steps of (a) receiving the electronic message from a source; (b) interpreting the electronic message using a rule base and case base knowledge engine; and (c) retrieving one or more predetermined responses corresponding to the interpretation of the electronic message from a repository for automatic delivery to the source.

10

15

20

25

30

Other features and advantages of the present invention will become apparent from the following description of the invention which refers to the accompanying drawings.

BRIEF DESCRIPTION OF THE DRAWINGS

For the purpose of illustrating the invention, there is shown in the drawing a form which is presently preferred, it being understood, however, that the invention is not limited to the precise arrangement and instrumentality shown.

Fig. 1 is a block diagram showing the automatic message interpreting and routing system of the preferred embodiment of the present invention; and

Figs. 2A and 2B are flow diagrams showing the high level process flow of the automatic message interpreting and routing system of Fig. 1.

DESCRIPTION OF THE PREFERRED EMBODIMENT

Referring now to the drawings wherein like numerals indicate like elements, there is shown in Fig. 1 a block diagram of the automatic message interpreting and routing system 1 of the preferred embodiment of the present invention. The system includes a domain server 10, a local server 20, and an automatic message reader 30.

The automatic message interpreting and routing system 1 also includes a manual reviewer (or human operator) 40 having access to a manual review data base 42. A plurality of customers 50 transmit electronic messages 11 to the automatic message interpreting and routing system 1 via source computers 52 coupled to the domain server 10. The domain server 10 preferably communicates with the local server 20 which communicates with an inbox storage device 22 for receiving the electronic messages 11 and an outbox 26. It is preferred that the electronic messages 11 are E-mail messages and are so referred to herein, it being understood, however, that other types of electronic messages 11 are contemplated as being within the scope of the invention.

The automatic message reader 30 includes a an archive 32, an action base 33, a case base 34, and a rule base 35. The action base 33, case base 34 and rule base 35 communicate via an appropriate software control program (described below) which executes the steps necessary to achieve the routing and interpretation of incoming E-mail messages 11.

10

15

20

25

30

The automatic message reader 30 preferably includes an embedded artificial intelligence (AI) application operating between an E-mail system and a customer service department. The customer service department, for example, provides new products and services to current and potential customers and maintains existing products and services by interacting with current customers. The automatic message reader 30 is a tool to more efficiently process incoming E-mail messages 11 in the customer service department.

The AI reasoning component (or knowledge engine) of the automatic message reader 30 uses a hybrid approach, i.e., a data-driven forward chaining rule parser operating in conjunction with a case based reasoner. This hybrid reasoning approach reflects the actual interpretation process used by human message reviewers in a customer service department.

The AI application emulates the recursive nature of human interpretation by first detecting combinations of prominent words (or text) and patterns of text within an electronic message 11 using a character matcher (preferably including a trigram character matching algorithm). As discussed in more detail below, predetermined attributes (or features) may be detected in the electronic message 11 during the character matching process. When certain attributes are detected, corresponding flags are set which (i) may directly lead to the classification of the electronic message 11; and/or (ii) may be subsequently used in a case base search.

The high level process flow for the system of Fig. 1 for automatically interpreting and routing an electronic message 11 is now described with further reference to Figs. 2A and 2B. At step 100, the customer so drafts an E-mail message 11 on the source computer 52 for transmission to a business concern employing the automatic message interpreting and routing system 1 of the present invention. The E-mail message 11 may include an inquiry and/or a statement for which the customer desires a response.

Unlike the help desk application of U.S. Patent No. 5,581,664 described above, in the instant invention the data of the electronic message 11 is delivered to the automatic message interpreting and routing system 1 in a non-interactive manner. Specifically, the customer 50 transmits a non-interactive electronic message 11 to the system 1. This non-interactive transmission of electronic messages 11 prescribes that the customer 50 need not later provide additional input to assist the system 1.

10

15

20

25

30

It is noted that defining an electronic message 11 as being non-interactive prescribes only that the message content need not be supplemented. Thus, as described in more detail below, the form of the non-interactive electronic message 11 may be altered by the system 1 after the customer 50 sends it; however, the customer 50 is not required to provide supplemental information to assist the system 1.

At step 102 the customer transmits the E-mail message 11 from the source 52 to the domain server 10 over a communications channel 12. The domain server 10 communicates with the local server 20 (step 104) for routing the E-mail message 11 to the inbox storage device 22. A local server 20 suitable for use in the present invention is the Lotus NotesTM mail database system.

At step 106, the automatic message reader 30 periodically checks the inbox 22 for new E-mail messages 11. The automatic message reader 30 preferably includes an application programming interface (API) which is a rule based program (employing phase rules). The API facilitates data communications between the automatic message reader 30 (which, for example, runs with a WindowsTM operating system) and the local server 20 (which, for example, runs with an OS2 operating system). Specifically, the API provides the following functions:

- 1. transferring data between the local server 20 and the automatic message interpreting and routing system 1;
- 2. retrieving E-mail messages 11 from the inbox 22 and delivering same to the automatic message reader 30;
- 3. delivering the E-mail messages 11 and any attachments (predetermined response and/or remarks) to the manual review inbox 24 and/or the outbox 26; and
- 4. marking a processed E-mail message 11 as having been processed by the automatic message reader 30.

10

15

20

25

The above processing steps and others will now be discussed in more detail. At step 106 the API of the automatic message reader 30 continuously monitors the inbox 22 for received E-mail messages 11 using a program loop. When a new E-mail message 11 has arrived, the automatic message reader 30 retrieves the E-mail message 11 and interprets it using a knowledge base capable of performing rule based parsing and case based retrieval (described in more detail below).

The interpretation of the E-mail message 11 by the automatic message reader 30 includes classifying the E-mail message 11 into (i) E-mail which is capable of being automatically responded to, called an "automatic" type E-mail message 11; and/or (ii) E-mail which is not capable of being automatically responded to and requires the assistance of the human operator 40, called a "referral" type E-mail message 11. Referral type E-mail messages 11 may also be of the "detected" type, which type of messages imply a particular manual handling procedure or require an interpretive aid for delivery to the human operator 40.

At step 108, a new E-mail message 11 is passed to the pre-processing block containing the rule base 35 of the knowledge engine. Preferably, the rule base 35 (and case base 34) are realized using the ART*Enterprise® tool, a knowledge-based application development tool, available from Brightware, Inc. of Stamford, CT. The ART*Enterprise® tool employs a text pattern matcher having a Rete algorithm which provides the interpretation power necessary to process the highly complex message content of the E-mail message 11.

The rule base 35 of the automatic message reader 30 contains "question" rules which take the form of IF-THEN statements with a left hand side of the statement containing a condition (or set of conditions) and a right hand side of the statement containing conclusion(s) (or actions). For example, a typical rule will take the following form:

condition₁?, condition₂? ... => action₁, action₂ ...

When the condition(s) on the left hand side of the rule are satisfied (or true) then the rule "fires" and the action(s) are executed. It is noted that the condition(s) will be deemed satisfied regardless of the order in which they are found true (i.e., the sequencing of conditions is irrelevant). This more closely parallels the recursive nature of

10

15

20

25

the message review process of a human and, therefore, it is preferred that the automatic message reader 30 employs this technique.

The left hand side conditions of the IF-THEN question rules contain the key linguistic clues that directly imply interpretive conclusions. These linguistic clues include literals, wild card patterns (e.g. text patterns), variables and segments, or choices of pattern sets. For example, if the business concern, ABC, Corp., employing the automatic message interpreting and routing system 1 of the present invention, were going to merge with XYZ Corp., any text reciting a "merger," and/or the "XYZ Corp" in a received E-mail message 11 is a linguistic clue as to the subject matter content of the E-mail message 11.

Question rules in the preferred embodiment of the present invention take on at least one of three forms, namely, (i) action setting rules, (ii) attribute setting rules, and (iii) action/attribute setting rules. Action rules are preferably received from the action base 33.

An action setting rule will cause a specific action to occur when the rule condition(s) are met. Depending on the detected conditions, the resulting action may include the final classification of the E-mail message 11 as "automatic" "referral" and/or "detected" (step 114, discussed in detail below). For example, when the condition that the body of the E-mail message 11 is blank is satisfied, then the action is preferably that the E-mail message 11 be classified as "automatic." Such an action rule would have the following form:

BLANK RULE:

body contains no text?

=> classify E-mail as "automatic."

An attribute setting rule is used when a satisfied condition is useful in subsequently matching the E-mail message 11 to stored case models of the case base 34 (step 112, described in more detail below). From the example above, one attribute of the E-mail message 11 could be assigned as any reference to the merger between ABC Corp. and XYZ Corp. Thus, an attribute setting question rule in the rule base 35 might be represented as follows:

MERGER RULE:

text include "merger," or "XYZ Corp."?
=> flag (set) merger attribute.

The application of the attribute setting rules produces a case model of the E-mail message 11 (i.e., an index of features useful in comparing the E-mail message 11 to the stored case models of the case base 34). Specifically, when attribute setting rules fire, specific attributes of the case model of the E-mail message 11 are flagged (i.e., set true). Thus, when a search of the case base 34 is required, the flagged attributes of the case model are used to search the stored case models of the case base 34.

An action/attribute setting rule is used when a satisfied condition indicates that the E-mail message 11 may be directly classified into one of the "automatic," "referred" and/or "detected" classifications and that one or more attributes should be set to aid in subsequently matching the E-mail message 11 to the stored case models of the case base. For example, if the customer sending the E-mail message 11 does not wish to be called on the telephone, then the classifying step should result in a "detected" type classification of the E-mail message 11 and that attribute should be set for aiding in searching the case base 34 (step 112, discussed below).

The following table lists a set of preferred question rules and the form (action, attribute or action/attribute) of each.

Question Rule Detects	Action Type: Classification			
customer's address	attribute/action: detected			
blank body	action: automatic			
service cancellation	action: referral			
change address	action: referral			
no call back	attribute/action: detected			
facsimile number	action: detected			
phone number	action: detected			
request for service	attribute			

15

5

10

reference to error	attribute
investments	attribute
foreign country	attribute/action: detected
lengthy message	attribute
specific product	attribute
multiple questions	attribute
specific employee	attribute/action: detected
lost product	action: referral
sensitive info	action: refer, auto, detected

TABLE 1 (Question Rules)

At step 110, if the pre-processing interpretation using only the rule base 35 results in a classification of the E-mail message 11, then the process flow proceeds to step 114.

When the subject matter of the E-mail message 11 is substantially ambiguous and the pre-processing step using the rule base 35 alone does not result in a classification of the E-mail message 11, then at step 110 the automatic message reader 30 accesses the case base 34 (step 112).

Recall that the rule base (step 108) produces a case model of the E-mail message 11. The case model of the E-mail message 11 is called a "presented" case model and is compared with a set of stored case models in the case base 34. These stored case models are created from previously received E-mail messages 11 and associated responses. The case base 34 preferably contains over 300 stored case models.

Referring to TABLE 2 below, each stored case model of the case base 34 preferably includes a title section, a subject section, a description section, an action section, and an attribute section.

TITLE:	Lengthy Inquiry From Imnop.com
SUBJECT:	New Account
DESCRIPTION:	Dear Sirs, I recently saw your advertisement in the newspaper. I am interested in learning whether or not your system would work for me.

10

15

10

15

	Please E-mail me back and let me know the details of your system.
	Thanks,
ACTIONS:	1. type: referral
	2. sub-class: sales
	3. priority: 3
ATTRIBUTES:	1. address: yes
	2. lengthy: yes

TABLE 2 Example: Stored Case Model

The title and subject sections generally identify the stored case model.

The description section of the stored case model contains the body of the previously sent E-mail messages 11 for comparison to the body of the presented case model.

It is noted that certain superfluous literals such as the author's address are removed from the description section of the stored case model. Instead, the attribute "address" is set to "yes" which indicates that an address was received. The proper removal of certain literals and the setting of attributes is very important in automatically interpreting the E-mail messages 11. Indeed, properly formed stored case models obviate the need to exactly match the presented case model and the stored case model.

The set of attributes (or slots) of the stored case model contain some important features of the prior received E-mail messages 11. For example, the attributes of the stored case model may include (1) a source's address; (2) a do not call request; (3) a request for service; (4) a reference to a foreign country; (5) a lengthy message; (6) a reference to a specific product and/or service; (7) a reference to multiple questions; and/or (8) a reference to a specific employee.

The attributes and description of the stored case model are searched vis-avis the attributes and description of a presented case model with the goal of finding a stored case model which has attributes and a description substantially matching the attributes and description of the presented case model. The automatic message reader 30 of the preferred embodiment of the present invention uses a trigram character matching algorithm which is available using the ART*Enterprise® tool.

In selecting the best stored case model vis-a--vis the presented-case model, the automatic message reader 30 searches each stored case model of the case base 34 and assigns a raw score to each stored case model. Each instance in which a piece of text, a

20

10

15

20

25

30

combination of text, and/or a pattern of text of the presented case model matches the stored case model, the raw score of the stored case model is increased. When a piece of text, a combination of text, and/or a pattern of text of the presented case model does not match the stored case model, the raw score of the stored case model is not increased, and may be decreased.

The raw score of a stored case model may increase or decrease in differing amounts depending on the particular feature (i.e., attribute) being searched. Thus, if feature₁ matches, the raw score may increase by match-weight, while if feature₂ matches, the raw score may increase by match-weight₂. Similarly, if feature₁ does not match, the raw score may decreased by mismatch-weight₁, while if feature₂ does not match, the raw score may decrease by mismatch-weight₂. It is preferred that the match-weight of each feature is a positive number and that the mismatch-weight is zero.

The weight that any matched feature contributes to the raw score is most meaningful when the maximum possible match score between a particular presented case model and the stored case model is considered. This is so because different stored case models may contain different numbers of features. Accordingly, it is preferred that the automatic message reader 30 of the preferred embodiment of the present invention normalize the raw score by dividing the raw score by the maximum possible match score. Thus, the normalized scores of each stored case model vis-a-vis the presented case model are compared to select the "best" stored case model.

Preferably, a global absence weight (for example, -1) is also assigned to the stored case models of the case base 34. The contribution of the absence weight to the raw score of a stored case model is determined by multiplying the global absence weight by the number of features (or attributes) which are present in the presented case model but are absent from the stored case model. The raw score is then normalized as described above.

Once a best stored case model has been identified, the automatic message reader 30 infers that the same or similar action that was taken on the E-mail of the stored case model should be taken on the E-mail message 11 which produced the presented case model. For example, the classification of the stored case model may be assigned to the E-mail message 11 of the present case model.

At step 114, the E-mail message 11 is classified into at least one of an "automatic" (step 114a), a "referral" (step 114b), and/or a "detected" (step 114c)

10

15

20

25

30

classification. As discussed above, the classification is achieved either through accessing only the rule base 35, or accessing both the rule base 35 and the case base 34.

When the automatic message reader 30 has classified the E-mail message 11 as being of the "automatic" type (step 114a), one or more predetermined responses (or prepared responses) are retrieved from a repository (or database), preferably the archive 32 (step 116a), of the automatic message reader 30 for automatic delivery to the source 52. As is evident from the discussion herein, the predetermined response is an appropriate response to the inquiry of the customer 50. It is understood that the predetermined response may be modified and/or altered in accordance with the interpretation of the E-mail message 11 if required to properly respond to a customer 50.

At step 122, the original E-mail message 11 and the predetermined response are routed from the automatic message reader 30 to the outbox 26 which communicates with the local server 20. The local server 20 then transfers the predetermined response to the domain server 10 for transmission to the source 52 over the communications channel 12 (step 124).

When the automatic message reader 30 is not capable of automatically responding to the E-mail message 11, the E-mail message 11 must be transferred to the human operator 40 for review. Thus, when the automatic message reader 30 classifies the E-mail message 11 as being of the "referral" type (step 114b), the automatic message reader 30 sub-categorizes the E-mail message 11 according to its subject matter content (step 116b) prior to transferring the E-mail message 11 to the human operator 40. The sub-categories are preferably related to specific business categories, such as (i) sales; and/or (ii) service.

At step 116b, the automatic message reader also assigns a priority (preferably including a priority number) to the sub-categorized E-mail message 11 where a higher priority indicates that the human operator 40 should process the associated E-mail message 11 before processing lower prioritized E-mail messages 11.

For example, through the rule based and case based reasoning discussed above, the automatic message reader 30 may interpret the subject matter content of an E-mail message 11 as being related to the product service sub-category. Within the product service sub-category, inquiries may be made relating to: (1) fraud and lost sensitive equipment (i.e., lost/stolen bank cards); (2) sensitive information (i.e., bank account information); (3) general information; and/or (4) user comments. It is preferred that a

human operator 40 (dealing with the product service business sub-category) process a customer's inquiry into a fraud before other types of inquiries and, therefore, the fraud inquiry is assigned a highest level of priority. Conversely, a user comment is preferably given a lowest level of priority and may be processed last.

Alternatively, the automatic message reader 30 may interpret the subject matter content of an E-mail message 11 as being related to the product sales sub-category. Within the product sales sub-category, inquiries may be made relating to: (1) promotional content; (2) requests for services; and (3) general questions and/or lengthy messages. It is preferred that a human operator 40 (dealing with the product sales business sub-category) process a customer's inquiry into a promotional effort before other types of inquiries and, therefore, the promotional inquiry is assigned a highest level of priority. Conversely, a general question is preferably given a lowest level of priority and may be processed last.

It is noted that when the automatic message reader 30 has invoked a case base 34 search in classifying the E-mail message 11, and the best stored case model indicates that the E-mail message 11 is of the referral type, then the sub-categorization and priority of the stored case model will also be assigned to the E-mail message 11 of the presented case model. Further, if the best case model identifies a particular predetermined response, such response (or a modification thereof) may be utilized in responding to the E-mail message 11 of the presented case model.

After the referral type E-mail message 11 has been sub-categorized and prioritized, the automatic message reader 30 routs the E-mail message 11 to the manual review inbox 24 (step 118) for subsequent retrieval by the human operator 40. If possible, one or more predetermined responses for proposed release and delivery to the source 52 are retrieved from the repository of the automatic message reader 30 and routed to the manual review inbox 24 along with the E-mail message 11.

At step 120, the human operator 40 (preferably assigned to a specific business sub-category) first reviews and processes the highest priority E-mail messages 11 followed by the lower prioritized E-mail messages 11. When the human operator 40 deems that a predetermined response is appropriate and may be released to the customer 50, the response is routed to the outbox 26 (step 122) for delivery to the domain server 10. The response is then transmitted over the data communications channel 12 to the source 52 (step 124).

20

15

5

10

25

10

15

20

25

30

Preferably, all outgoing responses are archived in an archive database 32 for subsequent review and use if desired.

When the automatic message reader 30 interprets that the referral type E-mail message 11 is also of the "detected" type (step 114c), a particular manual handling procedure for a referred E-mail message 11 has been interpreted from the subject matter of the E-mail. In such a case, one or more remarks (i.e., an explicative aid or advice) for presentation to the human operator 40 may be extracted from the repository of the automatic message reader 30 (step 116c) and routed to the manual review inbox 24 along with the E-mail message 11 (step 118) to assist the human operator 40 in processing the E-mail message 11 in a more efficient manner.

For example, when the automatic message reader 30 interprets a do not call request, a phone number, a facsimile-number or a foreign address, in the E-mail message 11, it is preferred that a remark indicating a specific manual procedure (e.g., not calling the customer) be forwarded with the E-mail message 11 to the human operator 40. Other types of "detected" features of E-mail messages 11 include, specific employee requests, inclusion of sensitive information, and/or inclusion of other information which dictates a specific manual procedure.

Such "detected" E-mail messages 11 often contain information which is useful in customizing and improving customer service vis-a-vis the responses to the E-mail messages 11.

In some instances the response to the customer's 50 E-mail message 11 may not be affected by such "detected" information. However, a human operator 40 might otherwise miss the "detected" information in a strictly manual review process. Thus, a business concern benefits from the classification of "detected" type E-mail messages 11 in that valuable business tools for servicing customers 50 may be developed using the detected information.

Advantageously, the automatic message interpreting and routing system 1 of the preferred embodiment of the present invention can properly process electronic messages 11 from any number of unknown sources (i.e., the sources need not be predetermined). Indeed, since the automatic message reader 30 employs a knowledge engine to automatically interpret the subject matter content of the electronic message 11, the specific source of the electronic message 11 does not limit the set of electronic

10

15

20

25

30

messages 11 which may be automatically responded to provided only that they arrive in a recognized format, like ASCII, etc.

The electronic message 11 is preferably an E--mail message in ASCII text data format, it being understood that the invention is not so limited. Indeed, the electronic message 11 may take on a variety of data formats including digital formats, voice data, dual tone multi-frequency (DTMF) tones, or the like. When the electronic message 11 is in the voice data format or DTMF data format, a receiving device (not shown) suitable for receiving the voice data and/or DTMF tones is included in the automatic message interpreting and routing system 1.

Further, the message data of the electronic message 11 may be converted from one data format to another prior to transferring the electronic message 11 to the inbox 22. For example, a customer 50 may transmit a printed document (message data) to the automatic message interpreting and routing system 1 by way of a facsimile machine. In that case, the facsimile format file would be converted using, for example, a character recognition process (not shown) which converts the facsimile formatted text into an ASCII data format electronic message 11 prior to transferring the electronic message 11 to the inbox 22.

The customer SO may also transmit an electronic message 11 in a voice data format to the automatic message interpreting and routing system 1 by way of known methods (e.g., dictation software such as is currently offered commercially from IBM). In such a case, the voice data is preferably converted into a digital text format electronic message 11, for example ASCII, prior to transferring the electronic message 11 to the inbox 22.

The system for automatically interpreting an incoming electronic message 1 is capable of interpreting electronic messages 11 which contain data in a predetermined arrangement, so-called fixed data electronic messages. An electronic message having fixed data may have the message content (i.e., the customer name, address, message content, etc.) in predetermined positions in the message.

The system for automatically interpreting an incoming electronic message 1 is also capable of interpreting electronic messages 11 which contain data in variable arrangements, so-called variable data. Such electronic messages having variable data may have the message content in any arrangement.

10

15

20

It is noted that a business concern may not wish to automatically send a predetermined response to a source 52 without first manually reviewing the response. In such a case, the system for automatically interpreting an incoming electronic message 1 of Fig. 1 would be modified such that all predetermined responses and/or remarks from the automatic message reader 30 are transferred to the manual review inbox 24. Thus, the process flow of Fig. 2B would be likewise modified such that the output from step 116a (retrieving a predetermined response) is directed to step 118 (transferring to the manual review inbox).

A working model of the system for automatically interpreting an incoming electronic message of the present invention has been developed which has significantly reduced costs of processing such messages. Specifically, about 5 to 80 percent (depending on the size and structure of the case base) of all incoming electronic messages were automatically processed while the processing time of those messages requiring manual intervention was reduced by about 50 percent.

The working system utilized the ART*Enterprise® version 2.0b, the Microsoft Win32s library, Visual C/C++ 1.5, and Lotus Notes™ version 3.OC running on a Windows 3.1 platform. The system employed an Intel-based 486/66 Mhz, 500 MB hard disk and 32 MB RAM computer.

Although the present invention has been described in relation to particular embodiments thereof, many other variations and modifications and other uses will become apparent to those skilled in the art. It is preferred, therefore, that the present invention be limited not by the specific disclosure herein, but only by the appended claims.

WHAT IS CLAIMED IS:

1		1.	A method for automatically interpreting a non-interactive		
2	electronic message, comprising the steps of:				
3	(a) receiving the electronic message from a source;				
4		(b)	interpreting the electronic message using a rule base and case base		
5	knowledge en	gine; an	d		
6		(c)	classifying the electronic message as at least one of (i) being able		
7	to be responde	ed to au	tomatically; and (ii) requiring assistance from a human operator.		
1		2.	The method of claim 1, further comprising the step of:		
2		(d)	retrieving one or more predetermined responses from a repository		
3	for automatic	deliver	y to the source when the classification step indicates that the		
4	electronic mes	ssage ca	an be responded to automatically.		
1		3.	The method of claim 1, further comprising the steps of:		
2		(d)	retrieving one or more predetermined responses from a repository,		
3	the predetermined responses being proposed for delivery to the source;				
4		(e)	forwarding the electronic message and the predetermined response		
5	to the human	operato	r when the classification step indicates that a response to the		
6	electronic me	ssage re	equires assistance from a human operator; and		
7		(f)	delivering the predetermined response to- the source when the		
8	human operator deems the response appropriate.				
1		4.	The method of claim 3, further comprising the step of:		
2		(c1) f	urther categorizing the electronic message into at least one of a		
3	plurality of s	ub-cateş	gories based on subject matter content of the electronic message.		
1		5.	The method of claim 4, wherein the sub-categories include product		
2	service subje	ct matte	er and product sales subject matter.		
1		6.	The method of claim 4, further comprising the step of:		
2		(c2)	prioritizing the sub-categorized electronic message into at least one		
3	of a plurality	of prio	rities based on the subject matter content of the electronic message		

wherein a higher priority indicates that the human operator should process the associated 4 electronic message before processing lower prioritized electronic messages. 5 7. The method of claim 6, wherein the plurality of priorities of a 1 product service sub-category include at least one of (i) fraud and lost products; (ii) 2 sensitive information; (iii) general information; and (iv) user comments. 3 The method of claim 7, wherein the listed priorities are in order 8. 1 from highest to lowest priority. 2 9. The method of claim 6, wherein the plurality of priorities of a 1 product sales sub-category include promotional content, request for services, and general 2 questions and lengthy messages. 3 The method of claim 9, wherein the listed priorities are in order 10. 1 2 from highest to lowest priority. The method of claim 1, wherein the step of classifying includes: 1 11. classifying the electronic message as at least one of (i) being able (c) 2 to be responded to automatically; (ii) requiring a first level of assistance from a human 3 operator; and (iii) requiring a second level of assistance from a human operator. 4 The method of claim 11, wherein: 1 12. when the classification step indicates that the electronic message requires a 2 first level of assistance from a human operator, the method further comprises the steps of: 3 retrieving one or more predetermined responses from a repository, 4 (d) the predetermined responses being proposed for delivery to the source; 5 forwarding the electronic message and the predetermined response 6 (e) 7 to the human operator; and (f) delivering the predetermined response to the source when the human 8 9 operator deems the response appropriate. The method of claim 11, wherein: 1 13. when the classification step indicates that the electronic message requires a 2 second level of assistance from a human operator, the method further comprises the steps 3 4 of:

5	(d) r	etrieving one or more predetermined remarks from a remarks
6	repository to assist the	human operator in processing the electronic message manually;
7	and	
8	(e) forw	arding the electronic message to the human operator.
1	14.	The method of claim 13, wherein the classification step indicates
2	that the electronic mess	sage requires a second level of assistance from a human operator
3	when at least one of a p	phone number, a foreign address, a do not call request, a facsimile
4	number, a specific emp	loyee request, sensitive information, and a specific manual
5	procedure is interpreted	d in the electronic message.
1	15.	The method of claim 1, wherein the electronic message is received
2	over an electronic data	communications channel.
1	16.	The method of claim 15, wherein the electronic data
2	communications chann	nel is the Internet.
1	17.	The method of claim 15, wherein the electronic message is an
2	electronic mail (E-mai	l) message.
1	18.	A method for automatically interpreting an electronic mail (E-mail)
2	message, comprising t	he steps of:
3	(a)	receiving the E-mail from a source over an electronic data
4	communications change	nel;
5	(b)	interpreting the E-mail using a rule base and case base knowledge
6	engine; and	
7	(c)	classifying the E-mail as at least one of (i) being able to be
8	responded to automati	cally; and (ii) requiring assistance from a human operator; wherein
9	when the	he classification indicates that the E-mail can be responded to
10	automatically, the met	hod further includes the steps of:
11	(d)	retrieving one or more predetermined responses from a repository;
12	(e)	formulating an E-mail response from the predetermined response;
13	and	
14	(f)	transmitting the E-mail response to the source over the data
15	communications chan	nel.

1	19.	A method for automatically interpreting a non-interactive
2	electronic message,	comprising the steps of:
3	(a)	receiving the electronic message from a source;
4	(b)	interpreting the electronic message using a rule base and case base
5	knowledge engine;	and
6	(c)	retrieving one or more predetermined responses corresponding to
7	the interpretation of	the electronic message from a repository for automatic delivery to the
8	source.	
1	20.	The method of claim 19, wherein the source of the electronic
2	message is not prede	etermined.
1	21.	The method of claim 19, further comprising the steps of:
2	(b1)	classifying the electronic message as at least one of (i) being able
3	to be responded to a	automatically; and (ii) requiring assistance from a human operator; and
4	(c)	retrieving one or more predetermined responses corresponding to
5	the interpretation of	the electronic message from a repository for automatic delivery to the
6	source when the cla	ssification step indicates that the electronic message can be responded
7	to automatically.	
1	22.	The method of claim 21, wherein the step of interpreting the
2	electronic message	further includes the steps of:
3	(b1)	producing a case model of the electronic message including a set of
4	predetermined attrib	outes for identifying specific features of the electronic message;
5	(b2)	detecting at least one of text, combinations of text, and patterns of
6	text of the electroni	c message using character matching;
7	(b3)	flagging the attributes of the case model which are detected in the
8	electronic message;	and
9	(b4)	classifying the electronic-message as at least one of (i) being able
10	to be responded to	automatically; and (ii) requiring assistance from a human operator, the
11	classification being	performed in accordance with the flagged attributes.
1	23.	The method of claim 21, wherein the step of interpreting the
2	electronic message	further includes the steps of:

3	(b1) p	roducing a case model of the electronic message including (i) a
4	set of attributes for iden	tifying specific features of the electronic message; and (ii)
5	message text;	
6	(b2) d	etecting at least one of text, combinations of text, and patterns of
7	text of the electronic me	essage using character matching;
8	(b3) f	lagging the attributes of the case model which are detected in the
9	electronic message;	
10	(b4) c	comparing the flagged attributes of the case model with stored
11	attributes of stored case	e models of the case base;
12	(b5) c	comparing the text of the case model with stored text of the stored
13	case models of the case	base; and
14	(b6) a	ssigning a score to each stored case model which is compared
15	with the case model, the	e score increasing when at least one of the attributes and the text
16	match the stored case n	nodel and the score not increasing when at least one of the
17	attributes and the text d	lo not match the stored case model.
1	24.	Γhe method of claim 23, wherein:
2		least one of the attributes and the text match the stored case
3		reased by a predetermined match weight; and
4		least one of the attributes and the text does not match the stored
5		s decreased by a predetermined mismatch weight.
		, ,
1	25.	The method of claim 24, wherein the match weight has an absolute
2	value greater than zero	and the mismatch weight is zero.
1	26.	The method of claim 24, wherein each score is normalized by
2	dividing the score by a	maximum possible score for the stored case model, where the
3	maximum possible sco	re is determined when all of the attributes and text of the case
4	model and the stored c	ase model match.
1	27.	The method of claim 23, further comprising the step of:
2		classifying the electronic message as at least one of (i) being able
3	` /	omatically; and (ii) requiring assistance from a human operator, the
4	•	ectronic message being performed in accordance with the
5		ored case model having a highest score.

1	28. The method of claim 27, further comprising the step of:
2	(c) retrieving one or more predetermined responses corresponding to
3	the interpretation of the electronic message from a repository for automatic delivery to the
4	source when the classification step indicates that the electronic message can be responded
5	to automatically.
1	29. The method of claim 28, wherein the predetermined response is
1	altered in accordance with the interpretation of the electronic message before delivery to
2	
3	the source.
1	30. The method of claim 23, wherein the attributes include at least one
2	of a source's address, a do not call request, a request for service, a reference to a foreign
3	country, a long message, a reference to a specific product, a reference to multiple
4	questions, and a reference to a specific employee.
1	31. A system for automatically interpreting a non-interactive electronic
2	message received from a source, the system comprising:
3	a server for transmitting and receiving electronic messages over a
4	communications channel;
5	an inbox storage device for storing incoming electronic messages;
6	a knowledge engine including a rule base and a case base, the case base
7	having a plurality of stored cases representing past received electronic messages;
8	a pre-processor for receiving the electronic message and interpreting the
9	electronic message using the rule base;
10	a searching device for searching the electronic message and the case base
11	to retrieve a stored case from the case base which most closely matches the electronic
12	message;
13	a classifier for classifying the electronic message into at least one of (i)
14	being able to be responded to automatically; and (ii) requiring assistance from a human
15	operator.
1	32. The system of claim 31, further comprising:
2	a repository of predetermined responses, at least one of the responses
3	being selected from the repository by the knowledge base for automatic delivery to the

2

3

4

5

6

7

1

2

3

1

2

1

2

3

4

5

source when the classifier indicates that the electronic message can be responded to automatically.

33. The system of claim 31, further comprising:

a repository of predetermined responses, one or more of the predetermined responses being selected by the knowledge base for proposed delivery to the source; and an electronic router for forwarding the electronic message to the human operator when the classifier indicates that a response to the electronic message requires assistance from a human operator, the router delivering the predetermined response to the source when the human operator deems the response appropriate.

- 34. The system of claim 33, wherein the classifier categorizes the electronic message into at least one of a plurality of sub-categories based on subject matter content of the electronic message.
- 35. The system of claim 34, wherein the sub-categories include product service subject matter and product sales subject matter.
- 36. The system of claim 34, wherein the classifier prioritizes the subcategorized electronic message into at least one of a plurality of priorities based on the subject matter content of the electronic message wherein a higher priority indicates that the human operator should process the associated electronic message before processing lower prioritized electronic messages.
- 1 37. The system of claim 36, wherein the plurality of priorities of a 2 product service sub-category include at least one of (i) fraud and lost products; (ii) 3 sensitive information; (iii) general information; and (iv) user comments.
- 1 38. The system of claim 37, wherein the listed priorities are in order 2 from highest to lowest priority.
- 1 39. The system of claim 36, wherein the plurality of priorities of a 2 product sales sub-category include promotional content, request for services, and general 3 questions and lengthy messages.
- 1 40. The system of claim 39, wherein the listed priorities are in order 2 from highest to lowest priority.

1	41.	A method for automatically interpreting a non-interactive			
2	electronic message, comprising the steps of:				
3	(a)	receiving the electronic message from a source;			
4	(b)	interpreting the electronic message using a rule base and case base			
5	knowledge engine;				
6	(c)	retrieving one or more predetermined responses from a repository,			
7	the predetermined re	sponses being proposed for delivery to the source;			
8	(d)	forwarding the electronic message and the predetermined response			
9	to a human operator;	and			
10	(e)	delivering the predetermined response to the source when the			
11	human operator deer	ns the response appropriate.			
1	42.	The method of claim 41, further comprising the step of:			
2	(b1) c	categorizing the electronic message into at least one of a plurality of			
3	sub-categories based	on subject matter content of the electronic message.			
1	43.	The method of claim 42, wherein the sub-categories include			
2	product service subje	ect matter and product sales subject matter.			
1	44.	The method of claim 43, further comprising the step of:			
2	(b2)	prioritizing the sub-categorized electronic message into at least one			
3	of a plurality of prio	rities based on the subject matter content of the electronic message			
4	wherein a higher pri	ority indicates that the human operator should process the associated			
5	electronic message b	pefore processing lower prioritized electronic messages.			
1	45.	The method of claim 44, wherein the plurality of priorities of a			
2	product service sub-	category include at least one of (i) fraud and lost products; (ii)			
3	sensitive information	n; (iii) general information; and (iv) user comments.			
1	46.	The method of claim 45, wherein the listed priorities are in order			
2	from highest to lowe	est priority.			
1	47.	The method of claim 44, wherein the plurality of priorities of a			
2	product sales sub-ca	tegory include promotional content, request for services, and general			
3	questions and length	ny messages.			

1		48.	The method of claim 47, wherein the listed priorities are in order	
2	from highest to lowest priority.			
1		49.	The method of claim 41, wherein the step of interpreting the	
2	electronic mes	ssage fu	rther includes the steps of:	
3		(b1) pr	oducing a case model of the electronic message including a set of	
4	predetermined	l attribu	tes for identifying specific features of the electronic message;	
5		(b2) de	tecting at least one of text, combinations of text, and patterns of text	
6	of the electron	nic mess	age using character matching; and	
7		(b3)	flagging the attributes of the case model which are detected in the	
8	electronic me	ssage.		
1		50.	The method of claim 41, wherein the step of interpreting the	
2	electronic me	ssage fu	rther includes the steps of:	
3		(b1)	producing a case model of the electronic message including (i) a	
4	set of attribute	es for id	entifying specific features of the electronic message; and (ii)	
5	message text;			
6		(b2)	detecting at least one of text, combinations of text, and patterns of	
7	text of the ele	ectronic	message using character matching;	
8		(b3)	flagging the attributes of the case model which are detected in the	
9	electronic me	ssage;		
10		(b4)	comparing the flagged attributes of the case model with stored	
11	attributes of stored case models			
12		of the	case base;	
13		(b5)	comparing the text of the case model with stored text of the stored	
14	case models	of the ca	ase base; and	
15		(b6)	assigning a score to each stored case model which is compared	
16	with the case	model,	the score increasing when at least one of the attributes and the text	
17	match the sto	ored case	e model and the score not increasing when at least one of the	
18	attributes and	i the tex	t do not match the stored case model.	
1		51.	The method of claim 50, wherein:	
2		when	at least one of the attributes and the text match the stored case	
3	model, the so	core is in	ncreased by a predetermined match weight; and	

2

variable data.

60.

4 when at least one of the attributes and the text does not match the stored 5 case model, the score is decreased by a predetermined mismatch weight. 1 52. The method of claim 51, wherein the match weight has an absolute 2 value greater than zero and the mismatch weight is zero. The method of claim 51, wherein each score is normalized by 1 53. dividing the score by a maximum possible score for the stored case model, where the 2 maximum possible score is determined when all of the attributes and text of the case 3 model and the stored case model match. 4 The method of claim 1, further comprising the steps of: 54. 1 (a1) receiving the electronic message from the source in a first data format; 2 3 and (a2) converting the electronic message from the first data format to an 4 5 electronic message having a second data format. The method of claim 54, wherein the first data format is one of a 55. 1 printed document format, a voice data format, a dual tone multi-frequency (DTMF) 2 format, and a first digital data format. 3 1 56. The method of claim 55, wherein the second data format is a 2 second digital data format. 57. The method of claim 56, wherein the first and second digital data 1 2 formats are ASCII. 58. The method of claim 1, wherein the predetermined response is 1 altered in accordance the interpretation of the electronic message before delivery to the 2 3 source. 1 59. The method of claim 1, wherein the electronic message includes 2 fixed data.


The method of claim 1, wherein the electronic message includes

variable data.

The method of claim 19, wherein the predetermined response is 1 61. altered in accordance the interpretation of the electronic message before delivery to the 2 3 source. The method of claim 19, wherein the electronic message includes 62. 1 fixed data. 2 The method of claim 19, wherein the electronic message includes 63. 1 2 variable data. The system of claim 32, wherein the predetermined response is 64. 1 altered in accordance the interpretation of the electronic message before delivery to the 2 3 source. The method of claim 31, wherein the electronic message includes 65. 1 2 fixed data. The method of claim 31, wherein the electronic message includes 66. 1

AUTOMATIC MESSAGE INTERPRETATION AND ROUTING SYSTEM ABSTRACT OF THE DISCLOSURE

A method for automatically interpreting an electronic message, including the steps of (a) receiving the electronic message from a source; (b) interpreting the electronic message using a rule base and case base knowledge engine; and (c) classifying the electronic message as at least one of (i) being able to be responded to automatically; and (ii) requiring assistance from a human operator. The method for automatically interpreting an electronic message may also include the step of retrieving one or more predetermined responses corresponding to the interpretation of the electronic message from a repository for automatic delivery to the source.

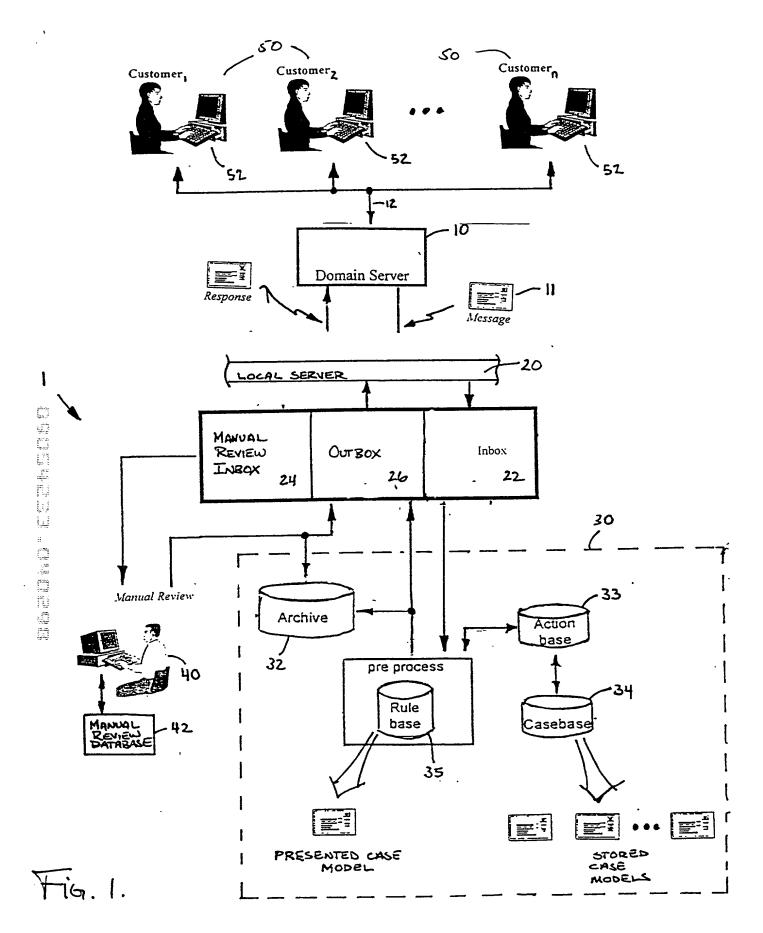

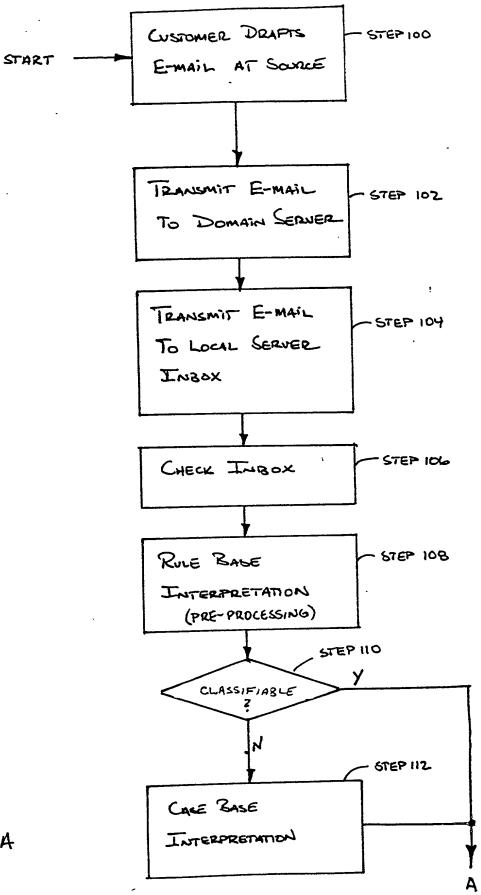


Fig. 24

A

DECLARATION

As a below named inventor, I declare that:

inventor (if or matter which	nly one naming the claimed and the specification.	e is listed below nd for which a p fication of whic	 v) or an original, first and patent is sought on the inverse. 	joint inventor (if plural in ention entitled: AUTOMA eto or was filed on	believe I am the original, faventors are named below) of TIC MESSAGE INTERP	of the subject RETATION
amendment re in accordance Code, Section	eferred to ab with Title 3 n 119 of any cation for pat	ove. I acknowle 37, Code of Fede 7 foreign applicatent or inventor'	edge the duty to disclose i eral Regulations, Section ation(s) for patent or inve	nformation which is mater 1.56. I claim foreign prior entor's certificate listed be	uding the claims, as amerial to the examination of thirty benefits under Title 35, lelow and have also identifies polication on which priority is	is application United States ed below any
Table of the state	Со	ountry	Application No.	Date of Filing	Priority Claimed Under 35 USC 119	
I hereby clai	m the benefi	it under Title 35	5, United States Code § 1	19(e) of any United States	s provisional application(s)	listed below:
			lication No. 0/042,494	Filing Da		

I claim the benefit under Title 35, United States Code, Section 120 of any United States application(s) listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of Title 35, United States Code, Section 112, I acknowledge the duty to disclose material information as defined in Title 37, Code of Federal Regulations, Section 1.56 which occurred between the filing date of the prior application and the national or PCT international filing date of this application:

April 4, 1997

60/042,656

Application No.	Date of Filing	Status
08/	May 8, 1997	Pending

Attorney Docket No.: 17111-23US

Full Name of	Last Name:	First Name:	Middle Name or Initial:	
Inventor 1:	RICE	AMY		
Residence &	City:	State/Foreign Country:	Country of Citizenship:	
Citizenship:	Ridgefield	CT	United States of America	
Post Office	Post Office Address:	City:	State/Country:	
Address:	22 Whitlock Lane	Ridgefield	CT	06877
Full Name of	Last Name:	First Name:	Middle Name or In	
Inventor 2:	HSU	JULIE		
Residence &	City:	State/Foreign Country:	Country of Citizenship:	
Citizenship:	Brooklyn	MA	United States of America	
Post Office	Post Office Address:	City:	State/Country:	Postal Code:
Address:	370 State Street #2	Brooklyn	MA	11217

I further declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code, and that such willful false statements may jeopardize the validity of the application or any patent issuing thereon.

Signature of Inventor 1	Signature of Inventor 2	Signature of Inventor 3
Amy Rice	Julie Hsu	
Date	Date	Date